

Please type a plus sign (+) inside this box →



PTO/SB/05 (1/98)

Approved for use through 09/30/2000 OMB 0651-0032

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 0670-208

First Inventor or Application Identifier: Kenichi SHIRAIISHI et al.

Title: A METHOD FOR REMOVING AN NEIGHBORING  
INTERFERENCE AND A CIRCUIT FOR THE SAME

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages [28]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) Total Sheets [5]
4. ☒ Oath or Declaration Total Pages [2]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a  
copy of the oath or declaration is supplied under Box 4b,  
is considered to be part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement ☐ Copies of IDS  
(IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ \*Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)
15. ☒ Certified Copy of Japanese Priority Document 10-080580  
(if foreign priority is claimed)
16. ☐ Other.

\*A new statement is required to be entitled to pay small entity fees,  
except where one has been filed in a prior application and is being  
relied upon.

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Prior application information: Examiner: \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name Eric J. Robinson  
Firm SIXBEY, FRIEDMAN, LEEDOM & FERGUSON, P C  
Address 8180 Greensboro Drive, Suite 800  
City McLean State VA  
Country U S A Telephone (703) 790-9110

Zip Code 22102  
FAX (703) 883-0370

Name: Eric J. Robinson

Registration No. 38,285

Signature

Date: February 11, 1999

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

A METHOD FOR REMOVING AM NEIGHBORING INTERFERENCE AND A  
CIRCUIT FOR THE SAME

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a method of selecting, during an AM broadcast reception, only a desired AM modulation wave on a desired channel by removing another AM modulation wave on a neighboring channel, and to an AM  
10 neighboring interference removing circuit executing such a method.

2. Description of the Related Art

An interchannel band width of an AM broadcast is set,  
15 for example, to 9 kHz in Japan, and an AM modulation side band width is permitted up to 7.5 kHz. An AM modulation wave from a remote site or an overseas country may superpose, particularly in a midnight, upon a neighboring channel of a desired channel. In such a case, a desired AM  
20 modulation wave with a superposed neighboring AM modulation wave is demodulated and a user listens to the demodulated sounds in a radio interference state, or the desired AM modulation wave is demodulated through SSB.

However, it is difficult to listen to demodulated  
25 signals in a radio interference state. If demodulation

through SSB is used and a desired channel is AM stereo broadcast, a user cannot listen to demodulated signals in a stereo state from the reason of the operation principle.

## 5 SUMMARY OF THE INVENTION

It is an object of the present invention to provide an AM neighboring interference removing method capable of selecting only a desired AM modulation wave even if an interfering AM modulation wave partially superposes upon the desired wave, and an AM neighboring interference removing circuit.

According to one aspect of the present invention, A method of removing AM neighboring interference of an AM receiver, is provided which comprises the steps of: multiplying an AM modulation wave desired to be received by a signal having a frequency higher by a predetermined frequency than a carrier frequency of an interference AM modulation wave causing neighboring interference and by another frequency lower by the predetermined frequency than the carrier frequency of the interference AM modulation wave; removing high frequency components from each of two multiplied signals to derive two signals, and subtracting one of the two derived signals from the other to obtain a subtraction signal; and removing high frequency components higher than a predetermined frequency from the subtraction

signal to obtain the AM modulation wave desired to be received.

With this AM neighboring interference removing method, first an AM modulation wave desired to be received is multiplied by a signal having a frequency higher by a predetermined frequency than a carrier frequency of an interference AM modulation wave causing neighboring interference and by another frequency lower by the predetermined frequency than the carrier frequency of the interference AM modulation wave, to obtain two multiplied signals. Next, high frequency components are removed from each of the two multiplied signals. One of the two multiplied signals with the high frequency components being removed is subtracted from the other to obtain a subtraction signal. Lastly, high frequency components higher than a predetermined frequency are removed from the subtraction signal to obtain the AM modulation wave desired to be received.

According to another aspect of the invention, an AM neighboring interference removing circuit for removing AM neighboring interference of an AM receiver, is provided which comprises: a first local oscillator for generating an oscillation output having a frequency of  $f_{p1}$ ; a second local oscillator for generating an oscillation output having a frequency of  $f_{p2}$ ; a first multiplier for

multiplying an AM stereo modulation wave desired to be received, by the oscillation output from the first local oscillator; a second multiplier for multiplying the AM stereo modulation wave desired to be received, by the oscillation output from the second local oscillator; a first low-pass filter for removing high frequency components contained in an output of the first multiplier; a second low-pass filter for removing high frequency components contained in an output of the second multiplier; a subtractor for subtracting an output of the second low-pass filter from an output of the first low-pass filter; and a low-pass filter for receiving an output of the subtractor and having a cut-off frequency of  $f_c/2$ , wherein  $f_c$  is a carrier frequency of an interference AM modulation wave causing neighboring interference,  $f_{p1} > f_{p2}$ , and  $f_{p1} - f_c = f_c - f_{p2}$ .

With this AM neighboring interference removing circuit, the AM stereo modulation wave and the interference modulation wave are frequency-converted by the first and second multipliers, and their low-frequency components are output from the first and second low-pass filters. It is assumed that a difference frequency is  $f_a$  between an AM carrier frequency of the AM stereo modulation wave desired to be received and a carrier frequency of an interference AM modulation wave. Of an output from the first low-pass

filter, the carrier frequency of the interference wave is  $f_c/2$  and the carrier frequency of the AM stereo modulation wave desired to be received is  $(f_c/2 - f_a)$ , and of an output from the second low-pass filter, the carrier frequency of the interference wave is  $f_c/2$  and the carrier frequency of the AM stereo modulation wave desired to be received is  $(f_c/2 + f_a)$ . The subtractor cancels out the interference wave, and the third low-pass filter selects only the AM stereo modulation wave desired to be received.

In this manner, the interference wave can be removed.

According to another aspect of the invention, an AM neighboring interference removing circuit for removing AM neighboring interference of an AM receiver, is provided which comprises: a first local oscillator for generating an oscillation output having a frequency of  $(f_{p1} + f_a)$ ; a second local oscillator for generating an oscillation output having a frequency of  $(f_{p2} - f_a)$ ; a third local oscillator for generating an oscillation output having a frequency of  $(f_{p2} + 3f_a)$ ; a first multiplier for multiplying an AM stereo modulation wave desired to be received, by the oscillation output from the first local oscillator; a second multiplier for multiplying the AM stereo modulation wave desired to be received, by the oscillation output from the second local oscillator; a third multiplier for multiplying the AM stereo modulation

wave desired to be received, by the oscillation output from the third local oscillator; a first low-pass filter for removing high frequency components contained in an output of the first multiplier; a second low-pass filter for removing high frequency components contained in an output of the second multiplier; a third low-pass filter for removing high frequency components contained in an output of the third multiplier; a subtractor for subtracting outputs of the second and third low-pass filters from an output of the first low-pass filter; and a band-pass filter for receiving an output of the subtractor and having a band-pass frequency in a range from  $(f_c/2 - f_a)$  to  $(f_c/2 + f_a)$ , wherein  $f_c$  and  $(f_c + 2f_a)$  are carrier frequencies of interference AM modulation waves causing neighboring interference, being lower and higher by a frequency  $f_a$  from an AM carrier frequency of the AM stereo modulation wave desired to be received,  $f_{p1} > f_{p2}$ , and  $f_{p1} - f_c = f_c - f_{p2}$ .

With this AM neighboring interference removing circuit, the AM stereo modulation wave and the interference modulation wave are frequency-converted by the first, second, and third multipliers, and their low-frequency components are output from the first, second, and third low-pass filters. It is assumed that a difference frequency is  $f_a$  between an AM carrier frequency of the AM stereo modulation wave desired to be received and a carrier

frequency of an interference AM modulation wave. Of an  
output from the first low-pass filter, the carrier  
frequency of the AM stereo modulation wave desired to be  
received is  $f_c/2$  and the carrier frequencies of the  
5 neighboring interference waves are at positions higher and  
lower by the frequency  $f_a$  from the frequency  $f_c/2$ . Of an  
output from the second low-pass filter, the carrier  
frequency of the AM stereo modulation wave desired to be  
received is  $(f_c/2 - 2f_a)$  and the carrier frequencies of the  
10 neighboring interference waves are at positions higher and  
lower by the frequency  $f_a$  from the frequency  $(f_c/2 - 2f_a)$ .  
Of an output from the third low-pass filter, the carrier  
frequency of the AM stereo modulation wave desired to be  
received is  $(f_c/2 + 2f_a)$  and the carrier frequencies of the  
15 neighboring interference waves are at positions higher and  
lower by the frequency  $f_a$  from the frequency  $(f_c/2 + 2f_a)$ .  
The subtractor cancels out the interference wave output  
from the first low-pass filter, and the band-pass filter  
selects only the AM stereo modulation wave desired to be  
20 received, from the first-low pass filter. In this manner,  
the interference waves can be removed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the structure of an  
25 AM neighboring interference removing circuit according to



an embodiment of the invention.

Figs. 2A to 2E are diagrams illustrating the operation of the AM neighboring interference removing circuit of the embodiment shown in Fig. 1.

5 Fig. 3 is a block diagram showing the structure of an AM neighboring interference removing circuit according to a first modification of the embodiment.

10 Figs. 4A to 4F are diagrams illustrating the operation of the AM neighboring interference removing circuit of the first modification.

Figs. 5A to 5E are diagrams illustrating the operation of an AM neighboring interference removing circuit according to a second modification of the embodiments.

#### 15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of a method and circuit for removing AM neighboring interference will be described.

20 Fig. 1 is a block diagram showing the structure of an AM neighboring interference removing circuit according to an embodiment of the invention.

An AM stereo modulation wave received at an AM receiver is supplied to a multiplier 3 whereat it is multiplied by an output from a local oscillator 1 having an oscillation frequency of  $(3/2)\omega_{ct}$ . The received AM stereo modulation wave is also supplied to a multiplier 4 whereat

25

it is multiplied by an output from a local oscillator 2 having an oscillation frequency of  $(1/2)\omega_{ct}$ . An output of the multiplier 3 is supplied to a low-pass filter 5 whereat the high frequency components of the multiplier output are removed. An output of the multiplier 4 is supplied to a low-pass filter 6 whereat the high frequency components of the multiplier output are removed.

The outputs from the low-pass filters 5 and 6 are supplied to a subtractor 7 whereat the output from the low-pass filter 5 is subtracted by the output from the low-pass filter 6. An output of the subtractor 7 is supplied to a low-pass filter 8 having a cut-off frequency of  $f_c/2$  ( $= \omega_c/4\pi$ ) whereat the high frequency components of the subtractor output are removed, and the signal with the removed high frequency components is output from the low-pass filter 8.

The operation of the AM neighboring interference removing circuit of the embodiment constructed as above will be described.

An AM stereo modulation wave desired to be received and mixed with a neighboring interference wave is written by the following equation (1).

$$v(t) = (1 + M_0)\cos\{(\omega_c + \omega_a)t + \theta\} + (1 + M_1)\cos(\omega_{ct}) \dots (1)$$

where  $M_0 = 1 + K_0 \cdot v_{m0}(t)$ ,

$$M_1 = 1 + \kappa_1 \cdot v_{m1}(t), \text{ and}$$

$$\theta = \arctan[\kappa_0 \cdot v_{s0}(t) / \{1 + \kappa_0 \cdot v_{m0}(t)\}].$$

In the equation (1), the first term is the AM stereo modulation wave desired to be received, and the second term is the neighboring AM interference wave. The affix 0 is used for the AM stereo modulation wave desired to be received, and the affix 1 is used for the neighboring AM interference wave.  $\kappa_0$  is an AM modulation factor of the AM stereo modulation wave desired to be received,  $\kappa_1$  is an AM modulation factor of the neighboring AM interference wave,  $v_{m0}(t)$  is a mono modulation wave of the AM stereo modulation wave desired to be received,  $v_{s0}(t)$  is a stereo modulation wave of the AM modulation wave,  $v_{m1}(t)$  is a modulation wave of the neighboring AM interference wave,  $\omega_c$  is an angular frequency (rad/s) of a neighboring AM interference carrier wave, and  $\omega_a$  is a difference angular frequency (rad/s) between the neighboring AM interference carrier wave and an AM modulation carrier wave desired to be received.

The AM stereo modulation wave desired to be received and mixed with the neighboring interference wave which is given by the equation (1) is schematically shown in Fig. 2A. A reference character "a" in Fig. 2A represents the AM stereo modulation wave desired to be received, and a reference character "b" represents the neighboring AM

interference wave.

The AM stereo modulation wave desired to be received and mixed with the neighboring interference wave is multiplied at the multiplier 3 by the output  $\cos(3/2)\omega_c t$  of the local oscillator 1, and the high frequency components are removed by the low-pass filter 5. An input to the low-pass filter 5 is  $v(t) \cdot \cos(3/2)\omega_c t$ , and an output thereof is written by the following equation (2).

$$\begin{aligned} &\text{An output of the low-pass filter 5} \\ &= (1 + M_0)\cos\{(-\omega_c/2 + \omega_a)t + \theta\} \\ &\quad + (1 + M_1)\cos(-1/2)\omega_c t \\ &= (1 + M_0)\cos\{(\omega_c/2 - \omega_a)t - \theta\} \\ &\quad + (1 + M_1)\cos(1/2)\omega_c t \quad \dots (2) \end{aligned}$$

The AM stereo modulation wave desired to be received and mixed with the neighboring interference wave is also multiplied at the multiplier 4 by the output  $\cos(1/2)\omega_c t$  of the local oscillator 2, and the high frequency components are removed by the low-pass filter 6. An input to the low-pass filter 6 is  $v(t) \cdot \cos(1/2)\omega_c t$ , and an output thereof is written by the following equation (3).

$$\begin{aligned} &\text{An output of the low-pass filter 6} \\ &= (1 + M_0)\cos\{(\omega_c/2 + \omega_a)t + \theta\} \\ &\quad + (1 + M_1)\cos(1/2)\omega_c t \quad \dots (3) \end{aligned}$$

The output of the low-pass filter 5 given by the equation (2) is schematically shown in Fig. 2B, and the

output of the low-pass filter 6 given by the equation (3) is schematically shown in Fig. 2C. The subtractor 7 subtracts the output of the low-pass filter 6 given by the equation (3) from the output of the low-pass filter 5 given by the equation (2). An input to the subtractor 7 is a signal of  $v(t) \cdot \cos(3/2)\omega_c t - v(t) \cdot \cos(1/2)\omega_c t$  - high frequency components, and an output of the subtractor 7 is given by the following equation (4).

An output of the subtractor 7

$$= (1 + M_0)\cos\{(\omega_c/2 - \omega_a)t - \theta\} + (1 + M_1)\cos\{(\omega_c/2 + \omega_a)t + \theta\} \quad \dots (4)$$

The output of the subtractor 7 is schematically shown in Fig. 2D. The low-pass filter 8 removes from the output of the subtractor 7 the second term of the equation (4) (indicated by oblique lines in Fig. 2D), and outputs a signal written by the following equation (5).

$$(1 + M_0)\cos\{(\omega_c/2 - \omega_a)t - \theta\} \quad \dots (5)$$

As seen from the equation (5), the output of the low-pass filter 8 is that shown in Fig. 2E which is the AM stereo modulation wave desired to be received. It can be understood that the AM neighboring interference removing circuit of the embodiment can remove the neighboring interference wave and receive only the AM stereo modulation wave desired to be received.

In the AM neighboring interference removing circuit of

this embodiment, the angular frequency of the local oscillator 1 is set to  $(3/2)\omega_c$  and the angular frequency of the local oscillator 2 is set to  $(1/2)\omega_c$ . The angular frequencies of the local oscillators 1 and 2 may be set to different frequencies so long as they satisfy the relation of  $(\omega_{pf1}) - \omega_c = \omega_c - (\omega_{pf2})$ , where  $(\omega_{pf1}) > (\omega_{pf2})$ ,  $(\omega_{pf1})$  stands for the angular frequency  $(3/2)\omega_c$ , and  $(\omega_{pf2})$  stands for the angular frequency  $(1/2)\omega_c$ .

A first modification of the AM neighboring interference removing circuit according to the embodiment of the invention will be described.

Fig. 3 is a block diagram showing the structure of the first modification of the AM neighboring interference removing circuit according to the embodiment of the invention.

In the first modification of the AM neighboring interference removing circuit according to the embodiment of the invention, two neighboring interference waves such as shown in Fig. 4A are removed respectively having frequencies higher and lower by  $\omega_a$  than the frequency of the AM stereo modulation wave desired to be received.

In the first modification of the AM neighboring interference removing circuit according to the embodiment of the invention, an AM stereo modulation wave desired to be received and mixed with neighboring interference waves

is written by the following equation (6).

$$\begin{aligned} v(t) = & (1 + M1) \cos(\omega_c t) \\ & + (1 + M0) \cos\{(\omega_c + \omega_a)t + \theta\} \\ & + (1 + M2) \cos(\omega_c + 2\omega_a)t \quad \dots (6) \end{aligned}$$

5 where  $M0 = 1 + \kappa_0 \cdot v_{m0}(t)$ ,

$M1 = 1 + \kappa_1 \cdot v_{m1}(t)$ ,

$M2 = 1 + \kappa_2 \cdot v_{m2}(t)$ , and

$\theta = \arctan[\kappa_0 \cdot v_{s0}(t) / \{1 + \kappa_0 \cdot v_{m0}(t)\}]$ .

10 In the equation (6), the first term is the neighboring interference wave having a lower frequency, the second term is the AM stereo modulation wave desired to be received, and the third term is the neighboring AM interference wave having a higher frequency. The affix 0 is used for the AM stereo modulation wave desired to be received, and the  
15 affixes 1 and 2 are used for the neighboring AM interference wave.  $\kappa_0$  is an AM modulation factor of the AM stereo modulation wave desired to be received,  $\kappa_1$  and  $\kappa_2$  are AM modulation factors of the neighboring AM interference waves,  $v_{m0}(t)$  is a mono modulation wave of the  
20 AM stereo modulation wave desired to be received,  $v_{m1}(t)$  and  $v_{m2}(t)$  are modulation waves of the neighboring AM interference waves,  $v_{s0}(t)$  is a stereo modulation wave of the AM modulation wave,  $\omega_c + \omega_a$  is an angular frequency (rad/s) of the AM stereo modulation carrier wave desired to  
25 be received,  $(\omega_c)$  and  $(\omega_c + 2\omega_a)$  are angular frequencies

(rad/s) of the neighboring AM interference carrier waves, and  $\omega\alpha$  is a difference angular frequency (rad/s) between each neighboring AM interference carrier wave and an AM modulation carrier wave desired to be received.

5           The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (6) is schematically shown in Fig. 4A. A reference character "a" in Fig. 4A represents the AM stereo modulation wave desired to be received, a reference character "b" represents the neighboring AM interference wave indicated by coarse meshes, and a reference character "c" represents the neighboring AM interference wave indicated by fine meshes.

10           The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (6) is multiplied at a multiplier 14 by an output  $\cos\{(3/2)\omega_c + \omega\alpha\}t$  of a local oscillator 11, and the multiplied output is supplied to a low-pass filter 17 whereat the frequency components of the multiplier output are removed. An input to the low-pass filter 17 is  $v(t) \cdot \cos(3/2)\omega_c + \omega\alpha)t$ , and an output thereof is written by the following equation (7).

          An output of the low-pass filter 17

$$= (1 + M_1)\cos\{(-1/2)\omega_c - \omega\alpha\}t$$

$$+ (1 + M_0)\cos\{(-1/2)\omega_c t + \theta\}$$



$$\begin{aligned}
& + (1 + M2)\cos\{(-1/2)\omega_c + \omega_a\}t \\
= & (1 + M1)\cos\{(1/2)\omega_c + \omega_a\}t \\
& + (1 + M0)\cos\{(1/2)\omega_c t - \theta\} \\
& + (1 + M2)\cos\{(1/2)\omega_c - \omega_a\}t \quad \dots (7)
\end{aligned}$$

5        The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (6) is multiplied at a multiplier 15 by an output  $\cos\{(1/2)\omega_c - \omega_a\}t$  of a local oscillator 12, and the multiplied output is supplied to a low-pass filter 18 whereat the frequency components of the multiplier output are removed. An input to the low-pass filter 18 is  $v(t) \cdot \cos(1/2)\omega_c - \omega_a\}t$ , and an output thereof is written by the following equation (8).

$$\begin{aligned}
& \text{An output of the low-pass filter 18} \\
= & (1 + M1)\cos\{(1/2)\omega_c + \omega_a\}t \\
& + (1 + M0)\cos[\{(1/2)\omega_c + 2\omega_a\}t + \theta] \\
& + (1 + M2)\cos\{(1/2)\omega_c + 3\omega_a\}t \quad \dots (8)
\end{aligned}$$

15        The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (6) is multiplied at a multiplier 16 by an output  $\cos\{(1/2)\omega_c + 3\omega_a\}t$  of a local oscillator 19, and the multiplied output is supplied to a low-pass filter 19 whereat the frequency components of the multiplier output are removed. An input to the low-pass filter 19 is  $v(t) \cdot \cos(1/2)\omega_c + 3\omega_a\}t$ , and an output thereof is written

by the following equation (9).

An output of the low-pass filter 19

$$\begin{aligned} &= (1 + M1)\cos\{(1/2)\omega_c - 3\omega_a\}t \\ &\quad + (1 + M0)\cos\{(1/2)\omega_c - 2\omega_a\}t + \theta \\ &\quad + (1 + M2)\cos\{(1/2)\omega_c - \omega_a\}t \quad \dots (9) \end{aligned}$$

The output of the low-pass filter 17 given by the equation (7) is schematically shown in Fig. 4B, the output of the low-pass filter 18 given by the equation (8) is schematically shown in Fig. 4C, and the output of the low-pass filter 19 given by the equation (9) is schematically shown in Fig. 4D. A subtractor 20 subtracts the outputs of the low-pass filters 18 and 19 given by the equations (8) and (9) from the output of the low-pass filter 17 given by the equation (7). With this subtraction, the first term of the equation (7) and the first term of the equation (8) are cancelled out, and the third term of the equation (7) and the third term of the equation (9) are cancelled out, so that a signal given by the following equation (1) is output from the subtractor 20.

An input to the subtractor 20

$$\begin{aligned} &= v(t) \cdot \cos\{(3/2)\omega_c + \omega_a\}t \\ &\quad - v(t) \cdot \cos\{(1/2)\omega_c - \omega_a\}t \\ &\quad - v(t) \cdot \cos\{(1/2)\omega_c + 3\omega_a\}t \\ &\quad - \text{high frequency components at each term.} \end{aligned}$$

An output of the subtractor 20

$$\begin{aligned}
&= (1 + M0)\cos\{(1/2)\omega_c t - \theta\} \\
&\quad + (1 + M0)\cos[\{(1/2)\omega_c + 2\omega_a\}t + \theta] \\
&\quad + (1 + M2)\cos\{(1/2)\omega_c + 3\omega_a\}t \\
&\quad + (1 + M1)\cos\{(1/2)\omega_c - 3\omega_a\}t \\
&\quad + (1 + M0)\cos[\{(1/2)\omega_c - 2\omega_a\}t + \theta] \quad \dots (10)
\end{aligned}$$

The output of the subtractor 20 given by the equation (10) is schematically shown in Fig. 4E. The subtraction output given by the equation (10) is supplied to a band-pass filter 21 having a band-path width of from  $(1/2)f_c - f_a$  to  $(1/2)f_c + f_a$  to remove the frequency components other than the band-path width. An output of the band-pass filter 21 is given by the following equation (11). A hatched portion in Fig. 4E is a frequency range other than the band-path width of the band-pass filter.

$$(1 + M0)\cos\{(1/2)\omega_c t - \theta\} \quad \dots (11)$$

The output of the band-pass filter given by the equation (11) is schematically shown in Fig. 4F. Only the AM stereo modulation wave desired to be received can therefore be selected.

A second modification of the AM neighboring interference removing circuit according to the embodiment of the invention will be described.

In the second modification of the AM neighboring interference removing circuit according to the embodiment of the invention, two neighboring interference waves such

as shown in Fig. 5A are removed having frequencies higher respectively by  $\omega\alpha$  and  $2\omega\alpha$  than the frequency of the AM stereo modulation wave desired to be received.

In the second modification of the AM neighboring interference removing circuit according to the embodiment of the invention, an AM stereo modulation wave desired to be received and mixed with neighboring interference waves is written by the following equation (12).

$$\begin{aligned} v(t) = & (1 + M_0)\cos\{(\omega_c - 2\omega\alpha)t + \theta\} \\ & + (1 + M_1) \cos(\omega_c - \omega\alpha)t \\ & + (1 + M_2) \cos(\omega_c t) \quad \dots (12) \end{aligned}$$

where  $M_0 = 1 + \kappa_0 \cdot v_{m0}(t)$ ,

$M_1 = 1 + \kappa_1 \cdot v_{m1}(t)$ ,

$M_2 = 1 + \kappa_2 \cdot v_{m2}(t)$ , and

$\theta = \arctan[\kappa_0 \cdot v_{s0}(t) / \{1 + \kappa_0 \cdot v_{m0}(t)\}]$ .

In the equation (12), the first term is the AM stereo modulation wave desired to be received, the second term is the neighboring interference wave having a lower frequency, and the third term is the neighboring AM interference wave having a higher frequency. The affix 0 is used for the AM stereo modulation wave desired to be received, and the affixes 1 and 2 are used for the neighboring AM interference waves.  $\kappa_0$  is an AM modulation factor of the AM stereo modulation wave desired to be received,  $\kappa_1$  and  $\kappa_2$  are AM modulation factors of the neighboring AM

interference waves,  $v_{m0}(t)$  is a mono modulation wave of the AM stereo modulation wave desired to be received,  $v_{m1}(t)$  and  $v_{m2}(t)$  are modulation waves of the neighboring AM interference waves,  $v_{s0}(t)$  is a stereo modulation wave of the AM modulation wave,  $(\omega_c - 2\omega_a)$  is an angular frequency (rad/s) of the AM stereo modulation carrier wave desired to be received,  $(\omega_c - \omega_a)$  and  $(\omega_c)$  are angular frequencies (rad/s) of the neighboring AM interference carrier waves, and  $\omega_a$  and  $2\omega_a$  are difference angular frequencies (rad/s) between each neighboring AM interference carrier wave and an AM modulation carrier wave desired to be received.

The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves is schematically shown in Fig. 5A. A reference character "a" in Fig. 5A represents the AM stereo modulation wave desired to be received, reference characters "b" and "c" represent the neighboring AM interference waves one of which is indicated by meshes.

The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (12) is multiplied by an output  $\cos\{(3/2)\omega_c + \omega_a)t$  of a local oscillator 11, and the multiplied output is supplied to a first low-pass filter whereat the frequency components of the multiplied output are removed. An input to the first low-pass filter is

$v(t) \cdot \cos(3/2)\omega_c + \omega_a)t$ , and an output thereof is written by the following equation (13).

An output of the first low-pass filter

$$\begin{aligned} &= (1 + M_0)\cos\{(-1/2)\omega_c - 2\omega_a\}t + \theta] \\ &+ (1 + M_1)\cos\{(-1/2)\omega_c - \omega_a\}t \\ &+ (1 + M_2)\cos(-1/2)\omega_c t \\ &= (1 + M_0)\cos\{(1/2)\omega_c + 2\omega_a\}t - \theta \\ &+ (1 + M_1)\cos\{(1/2)\omega_c t + \omega_a\}t \\ &+ (1 + M_2)\cos(1/2)\omega_c t \quad \dots (13) \end{aligned}$$

The AM stereo modulation wave desired to be received and mixed with the neighboring interference waves which is given by the equation (12) is multiplied by an output  $\cos\{(1/2)\omega_c t$  of a local oscillator, and the multiplied output is supplied to a second low-pass filter whereat the frequency components of the multiplied output are removed. An input to the second low-pass filter is  $v(t) \cdot \cos(1/2)\omega_c t$ , and an output thereof is written by the following equation (14).

An output of the second low-pass filter

$$\begin{aligned} &= (1 + M_0)\cos\{(1/2)\omega_c - 2\omega_a\}t + \theta] \\ &+ (1 + M_1)\cos\{(1/2)\omega_c - \omega_a\}t \\ &+ (1 + M_2)\cos\{(1/2)\omega_c t \quad \dots (14) \end{aligned}$$

The output of the first low-pass filter given by the equation (13) is schematically shown in Fig. 5B, and the output of the second low-pass filter given by the equation

(14) is schematically shown in Fig. 5C. A first subtractor subtracts the output of the second low-pass filter given by the equation (14) from the output of the first low-pass filter given by the equation (13). With this subtraction, the third term of the equation (13) and the third term of the equation (14) are cancelled out, so that a signal given by the following equation (15) is output from the first subtractor.

An input to the first subtractor

$$= v(t) \cdot \cos(3/2)\omega_c t - v(t) \cdot \cos(1/2)\omega_c t \\ - \text{high frequency components}$$

An output of the first subtractor

$$= (1 + M_0) \cos\left[\left\{\left(1/2\right)\omega_c - 2\omega_a\right\}t - \theta\right] \\ + (1 + M_1) \cos\left\{\left(1/2\right)\omega_c + \omega_a\right\}t \\ - (1 + M_0) \cos\left[\left\{\left(1/2\right)\omega_c - 2\omega_a\right\}t + \theta\right] \\ - (1 + M_1) \cos\left\{\left(1/2\right)\omega_c - \omega_a\right\}t \quad \dots (15)$$

The output of the first subtractor given by the equation (15) is schematically shown in Fig. 5D. The subtraction output given by the equation (15) is supplied to a third low-pass filter having a cut-off frequency of  $(1/2)f_c$  to remove the high frequency components. An output of the third low-pass filter is given by the following equation (16). A hatched portion in Fig. 4D is a high frequency range to be cut off by the third low-pass filter.

An output of the third low-pass filter

$$\begin{aligned} &= - (1 + M0)\cos\{[(1/2)\omega_c - 2\omega_a]t + \theta\} \\ &\quad - (1 + M1)\cos\{(1/2)\omega_c - \omega_a\}t \quad \dots (16) \end{aligned}$$

The output of the third low-pass filter given by the equation (16) is schematically shown in Fig. 5E. One of the neighboring interference waves can therefore be removed. The AM stereo modulation wave desired to be received and mixed with the other of the neighboring interference waves is supplied to the AM neighboring interference removing circuit of the embodiment of the invention to thereby remove the remaining neighboring interface wave with similar operations to the embodiment. Only the AM stereo modulation wave desired to be received can therefore be selected.

Even if a number of neighboring interference waves are superposed, all the waves can be removed by using a combination of the embodiment and the first and second modifications of the AM neighboring interference removing circuit of the invention.

As described so far, according to the embodiment method and circuit of removing AM interference, even an AM stereo modulation wave can be listened by a user as clear sounds without any neighboring interference waves which are conventionally listened as noises.



WHAT IS CLAIMED IS:

1. A method of removing AM neighboring interference of an AM receiver, comprising the steps of:

5 multiplying an AM modulation wave desired to be received by a signal having a frequency higher by a predetermined frequency than a carrier frequency of an interference AM modulation wave causing neighboring interference and by another frequency lower by the predetermined frequency than the carrier frequency of the  
10 interference AM modulation wave;

removing high frequency components from each of two multiplied signals to derive two signals, and subtracting one of the two derived signals from the other to obtain a subtraction signal; and  
15

removing high frequency components higher than a predetermined frequency from the subtraction signal to obtain the AM modulation wave desired to be received.

20 2. An AM neighboring interference removing circuit for removing AM neighboring interference of an AM receiver, comprising:

a first local oscillator for generating an oscillation output having a frequency of  $f_{p1}$ ;

25 a second local oscillator for generating an

oscillation output having a frequency of  $fp_2$ ;

a first multiplier for multiplying an AM stereo modulation wave desired to be received, by the oscillation output from said first local oscillator;

5 a second multiplier for multiplying the AM stereo modulation wave desired to be received, by the oscillation output from said second local oscillator;

a first low-pass filter for removing high frequency components contained in an output of said first multiplier;

10

a second low-pass filter for removing high frequency components contained in an output of said second multiplier;

15 a subtractor for subtracting an output of said second low-pass filter from an output of said first low-pass filter; and

a low-pass filter for receiving an output of said subtractor and having a cut-off frequency of  $fc/2$ ,

20 wherein  $fc$  is a carrier frequency of an interference AM modulation wave causing neighboring interference,  $fp_1 > fp_2$ , and  $fp_1 - fc = fc - fp_2$ .

3. An AM neighboring interference removing circuit for removing AM neighboring interference of an AM receiver, comprising:

25

a first local oscillator for generating an oscillation output having a frequency of  $(fp1 + fa)$ ;

a second local oscillator for generating an oscillation output having a frequency of  $(fp2 - fa)$ ;

5 a third local oscillator for generating an oscillation output having a frequency of  $(fp2 + 3fa)$ ;

a first multiplier for multiplying an AM stereo modulation wave desired to be received, by the oscillation output from said first local oscillator;

10 a second multiplier for multiplying the AM stereo modulation wave desired to be received, by the oscillation output from said second local oscillator;

a third multiplier for multiplying the AM stereo modulation wave desired to be received, by the oscillation output from said third local oscillator;

15

a first low-pass filter for removing high frequency components contained in an output of said first multiplier;

a second low-pass filter for removing high frequency components contained in an output of said second multiplier;

20

a third low-pass filter for removing high frequency components contained in an output of said third multiplier;

25 a subtractor for subtracting outputs of said second

and third low-pass filters from an output of said first low-pass filter; and

a band-pass filter for receiving an output of said subtractor and having a band-pass frequency in a range from  
5 (fc/2 - fa) to (fc/2 + fa),

wherein fc and (fc + 2fa) are carrier frequencies of interference AM modulation waves causing neighboring interference, being lower and higher by a frequency fa from an AM carrier frequency of the AM stereo modulation wave  
10 desired to be received, fp1 > fp2, and fp1 - fc = fc - fp2.

## ABSTRACT

An AM neighboring interference removing method and circuit is provided which can select only a desired AM modulation wave even if an interference AM modulation wave is partially superposed upon the desired AM modulation wave. An AM modulation wave desired to be received is multiplied at multipliers by local oscillation signals having frequencies  $3f_c/2$  and  $f_c/2$  where  $f_c$  is the carrier frequency of a neighboring interference AM modulation wave. High frequency components contained in the outputs of the multipliers are removed by low-pass filters. Of the outputs of the low-pass filters, the carrier frequency of the neighboring interference wave is  $f_c/2$  and the AM carrier frequencies of the AM stereo modulation wave are  $(f_c/2 + f_a)$  and  $(f_c/2 - f_a)$ , where  $f_a$  is a difference frequency between the AM carrier frequency of the AM stereo modulation wave and the carrier frequency of the neighboring interference wave. A subtractor subtracts the output of one of the low-pass filter from the output of the other to thereby cancel out the neighboring interference wave. This subtraction signal is passed through a low-pass filter having a cut-off frequency of  $f_c/2$  to derive only the AM stereo modulation wave.

F I G . 1


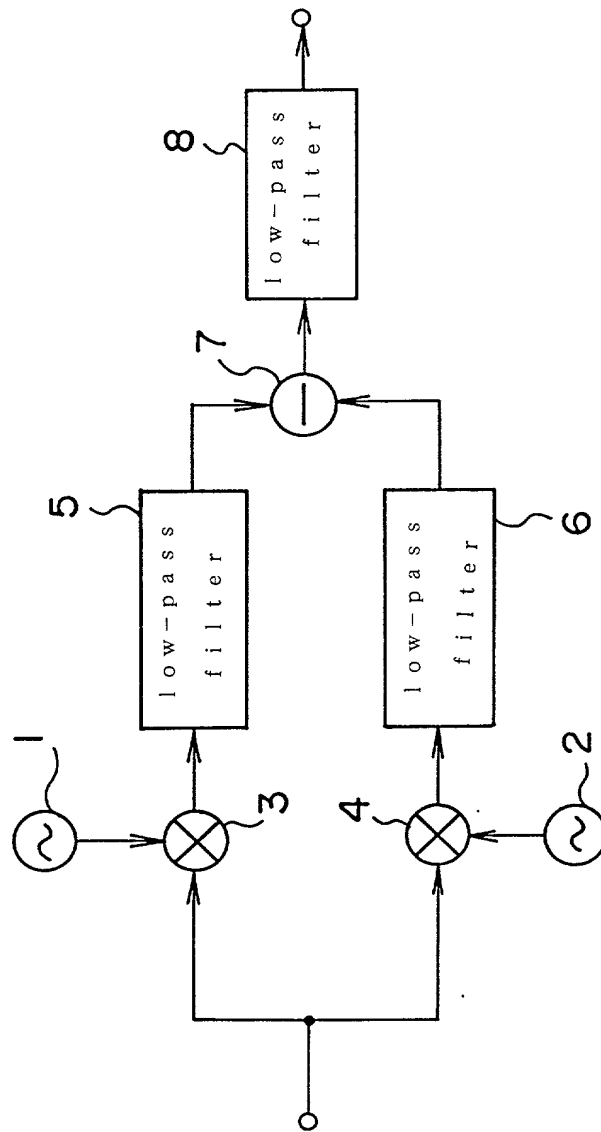


FIG. 2

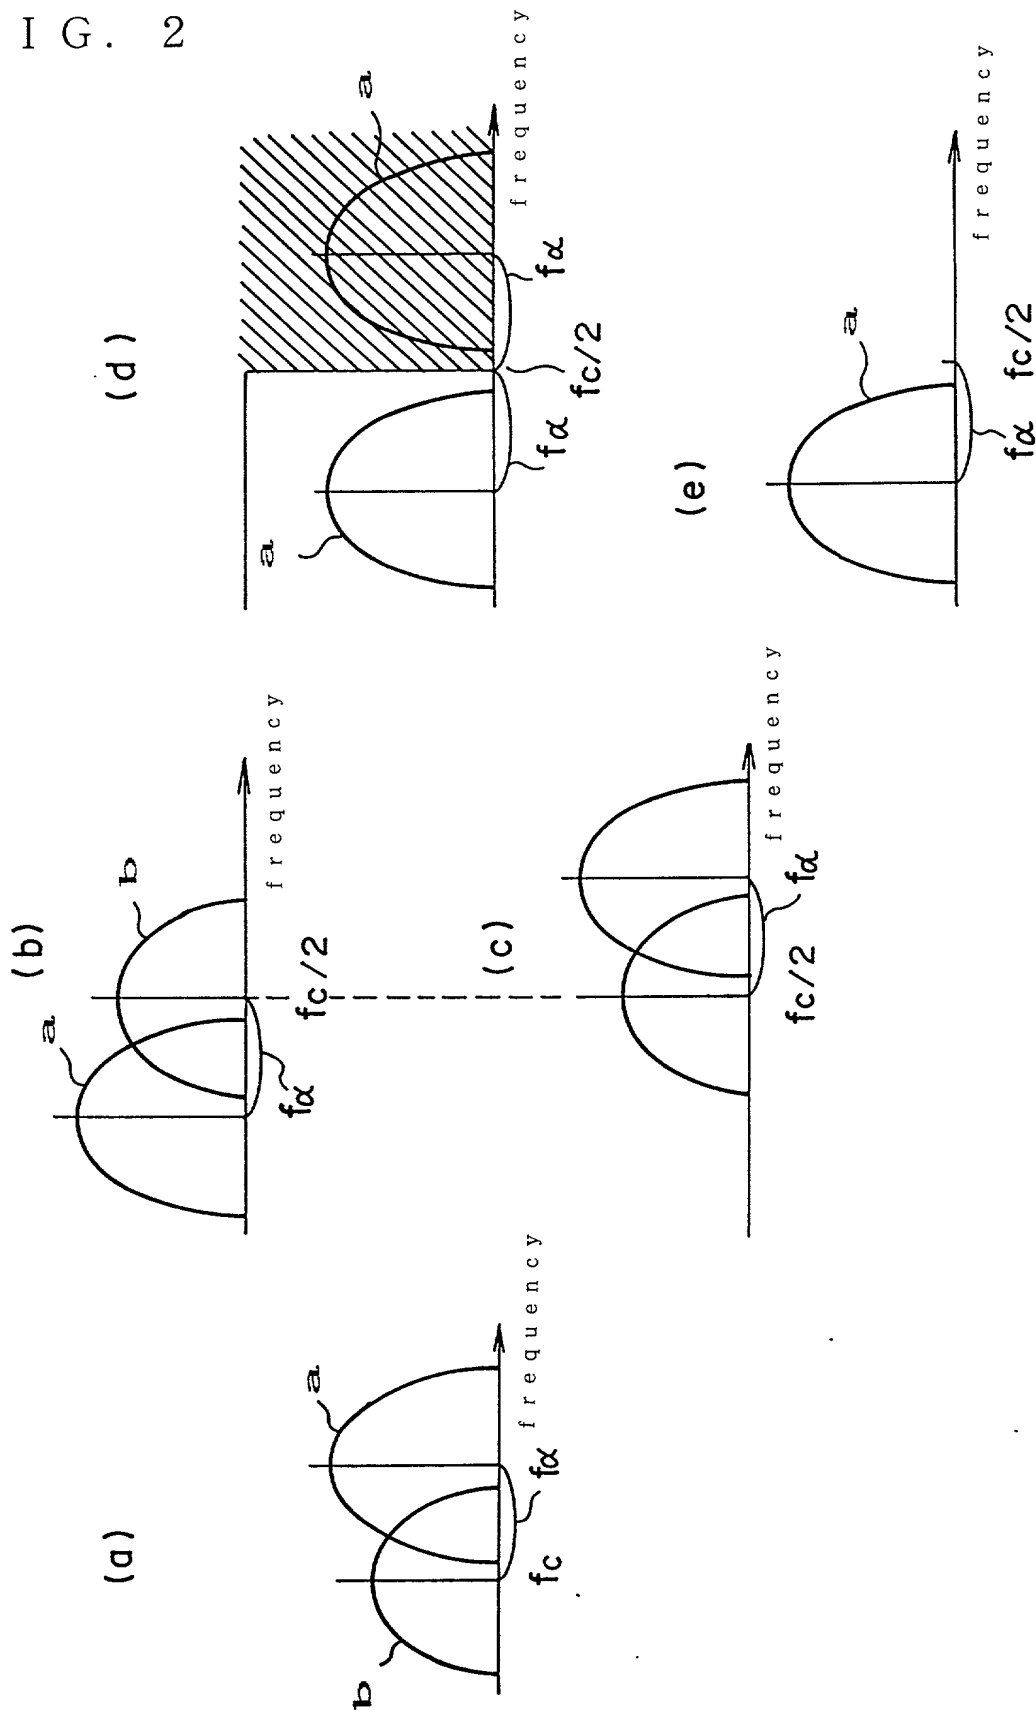

F I G . 3



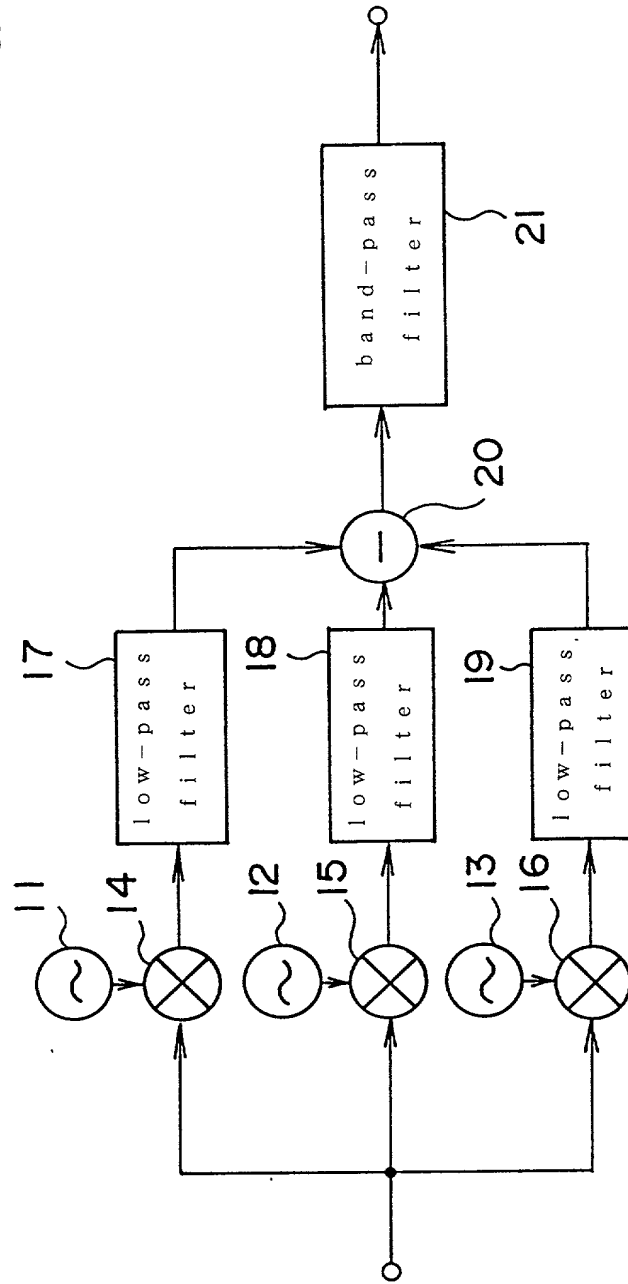




FIG. 4

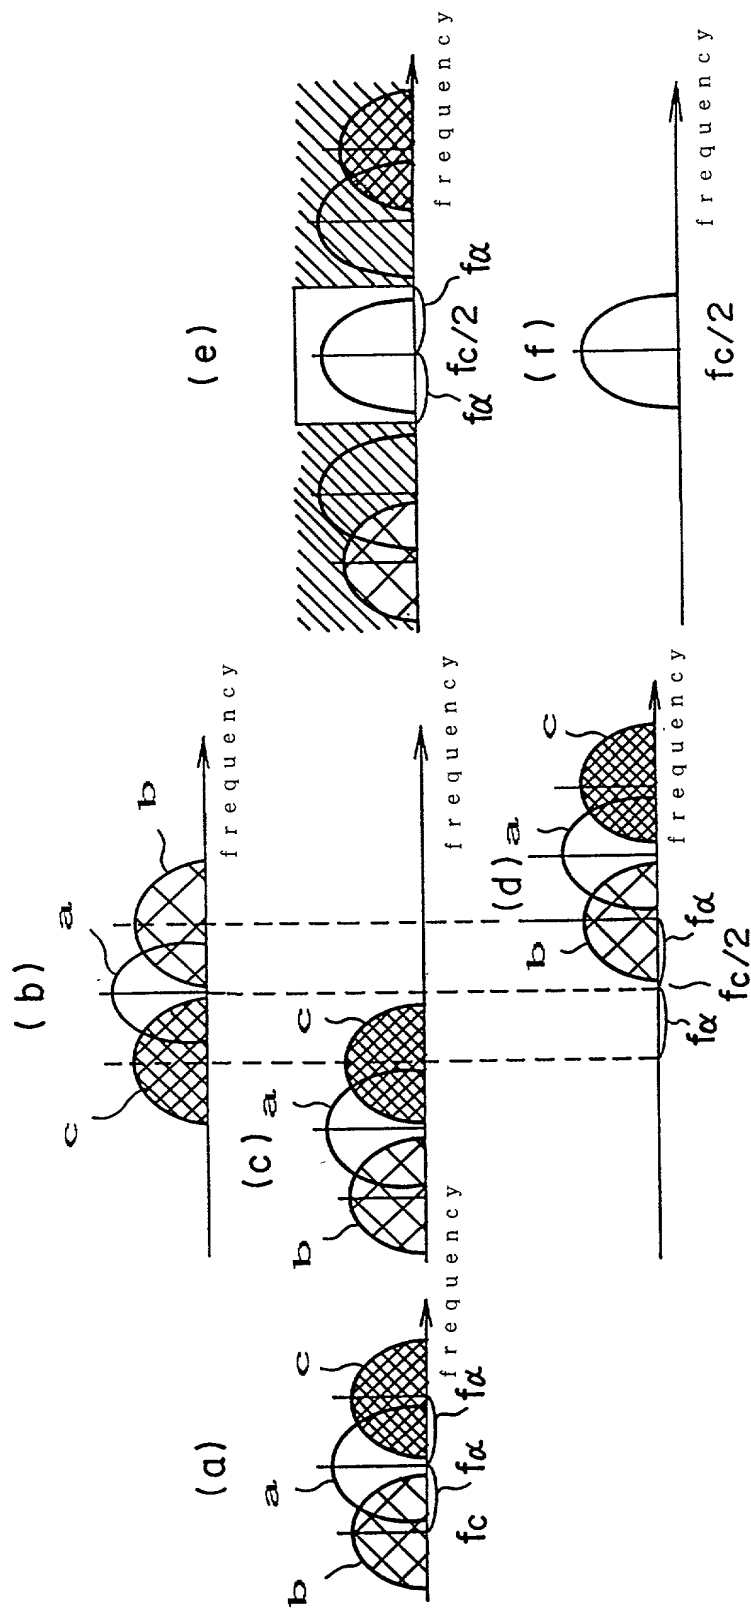

F I G . 5

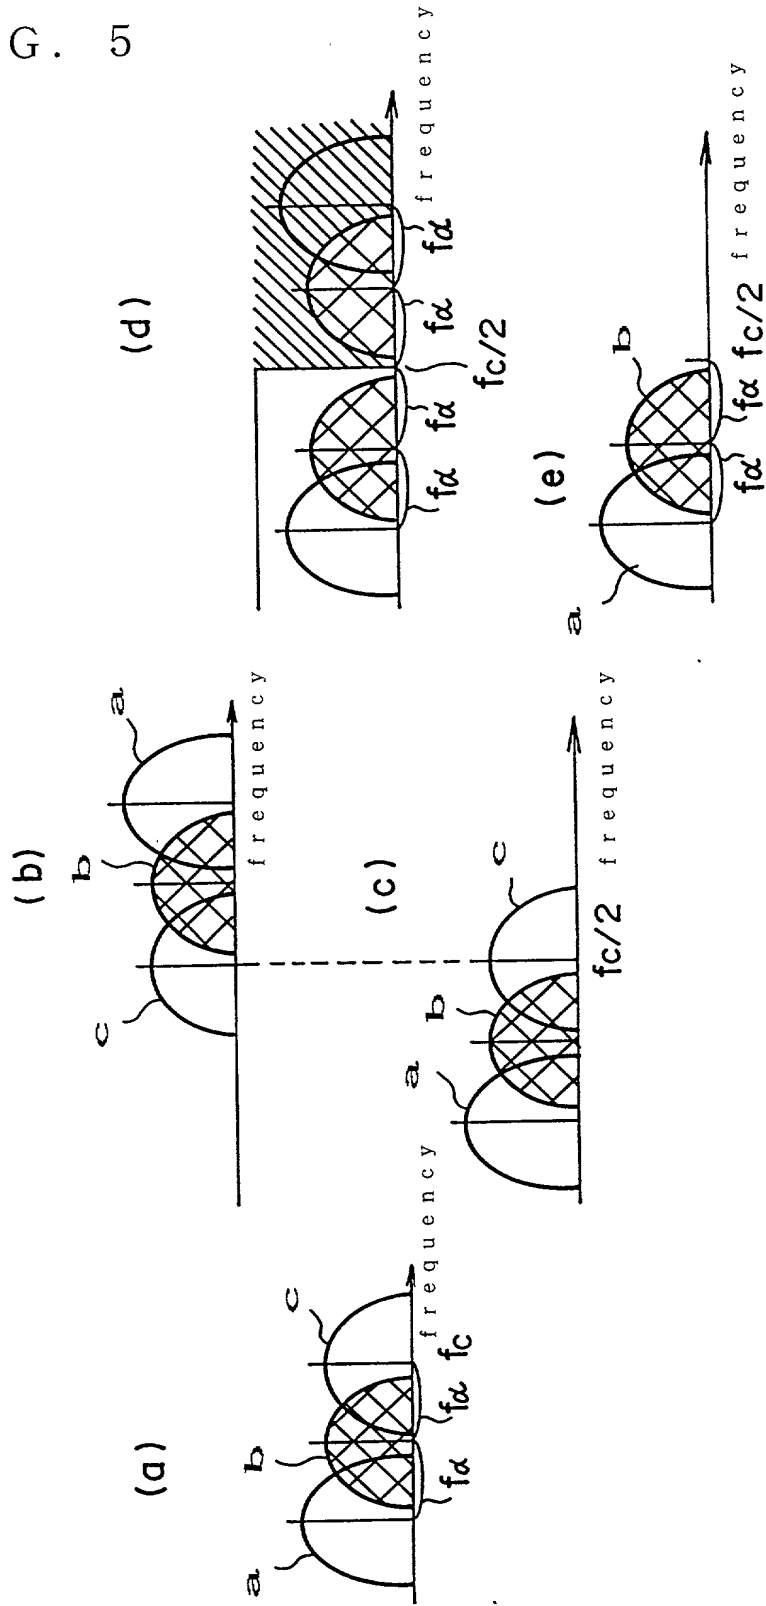

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

ATTORNEY DOCKET NO.

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

Insert Title

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the invention entitled: \*

➤ A METHOD FOR REMOVING AM NEIGHBORING INTERFERENCE AND A  
CIRCUIT FOR THE SAME

, the specification of which is attached hereto unless the following box is checked:

Check Box If  
Appropriate —  
For Use Without  
Specification  
Attached ➤

☐ The specification was filed on \_\_\_\_\_  
and was assigned Serial No. \_\_\_\_\_  
(if known)  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows:

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and checked at right:

## Prior Foreign Application(s)

Priority Claimed

Insert Priority  
Information  
(if appropriate) ➤

Patent Appln. No.	Country	Month/Day/Year Filed	Yes	No
10-80580	Japan	March 13, 1998	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/>	<input type="checkbox"/>

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months Prior To The Filing Date of This Application:

Country	Application No.	Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status—patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application and to transact all business in the Patent and Trademark Office connected therewith:

Daniel W. Sixbey (Reg. No. 20,932)  
Stuart J. Friedman (Reg. No. 24,312)  
Charles M. Leedom, Jr. (Reg. No. 26,477)

Gerald J. Ferguson, Jr. (Reg. No. 23,016)  
David S. Safran (Reg. No. 27,997)  
Thomas W. Cole (Reg. No. 28,290)

Send Correspondence to:

Gerald J. Ferguson Jr.  
SIXBEY, FRIEDMAN, LEEDOM & FERGUSON, P.C.  
2010 Corporate Ridge, Suite 600  
McLean, Virginia 22102  
Telephone: (703) 790-9110

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

The undersigned hereby authorize any U. S. attorney or agent named herein to accept and follow instructions from OKABE INTERNATIONAL PATENT OFFICE in Tokyo as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U. S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys or agents named herein will be so notified by the undersigned.

Insert Full Name of  
First or Sole Inventor  
and Date This  
Document Is Signed

Insert Residence  
Insert Citizenship

Insert Post Office  
Address

Second Inventor:  
see above

Third Inventor:  
see above

Fourth Inventor:  
see above

FULL NAME OF SOLE OR FIRST INVENTOR	INVENTOR'S SIGNATURE	DATE
Kenichi SHIRAISHI	<i>Kenichi Shiraishi</i>	FEB. 1, '99
RESIDENCE (City, State & Country)	CITIZENSHIP	
Yokohama-shi, Kanagawa, Japan	Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
Room 407, 475-3, Kariba-cyo, Hodogaya-ku, Yokohama-shi, Kanagawa 240-0025, Japan		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	INVENTOR'S SIGNATURE	DATE
Atsushi SHINODA	<i>Atsushi Shinoda</i>	Jan. 13, 1999
RESIDENCE (City, State & Country)	CITIZENSHIP	
Sagamihara-shi, Kanagawa, Japan	Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
Room 101, 1-18-21, Yaei, Sagamihara-shi, Kanagawa 229-0029, Japan		
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)	CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)	CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		